


Product: **25210**

Conductor 10 AWG Stranded Unshielded Plenum
for Audio, Speaker Systems - Large Venue

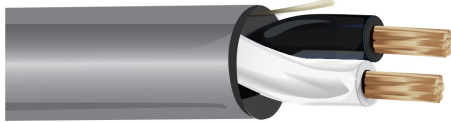

| CONDUCTOR PARAMETERS | |
|----------------------------|--------------------|
| Nom. of Conductors | 2 |
| AWG Size | 10 AWG |
| Conductor Stranding | 65x28 |
| Conductor Type | Bare Copper |
| Nom. DCR | 1.1 Ω/1000 ft |
| INSULATION PARAMETERS | |
| Insulation Type | Plenum PVC |
| Insulation Thickness | .012 in |
| Insulation Color Code | 1. Black, 2. White |
| SHIELDING PARAMETERS | |
| Shield Type | Unshielded |
| ELECTRICAL CHARACTERISTICS | |
| Nom. Cap. Between Cond. | 28 pf/ft |
| Nom. Inductance | .14 μH/ft |
| Current (Element) | 27 A/Cond. @25°C |

| OVERALL CONSTRUCTION PARAMETERS | |
|---------------------------------|-----------------|
| Total No. of Conductors | 2 |
| Jacket Type | Flex Plenum PVC |
| Nom. Jacket Thickness | .015 in |
| Nom. Cable O.D. | .275 in |
| Plenum | Yes |
| NEC UL Rating | CL2P |
| RoHS Compliant | Yes |
| Bend Radius | 1.2 |
| Pull Tension | 160 lbs |
| Cable Weight | 88 lbs |

| OVERALL ELECTRICAL CHARACTERISTICS | |
|------------------------------------|-----------------|
| UL Flammability | NFPA 262 Plenum |
| OPERATING RANGE | -20 to 75°C |
| UL VOLTAGE | 300 |

| RELATED PRODUCTS | |
|------------------|--------------|
| Non Plenum Item | HA210 |
| Outdoor | C210 / NJ210 |