

Armored Fire Power Limited Plenum (FPLP) Alarm

Features


- Interlocking Aluminum Armoring
- Power Limited Red Jacket Fire Alarm
- Unshielded and Shielded Versions
- 300V Low Voltage
- Low Smoke Plenum Internal Cable

Applications

- Fire Alarm Initiating Devices and Notification Devices
- Fire Alarm Monitoring/Detection
- Audio and Control Circuits




Unshielded FPLP

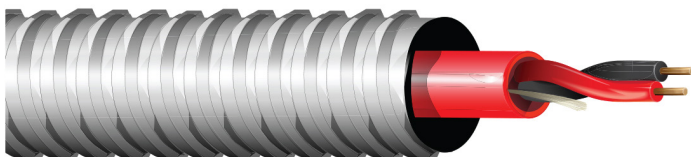

Catalog No.	No. Of Conductors	Cond. Type & Nom. DCR	Insulation Type & Thickness	Shielding	Jacket Type & Thickness	Armoring Type	Nom. O.D.	NEC Rating
AR60980	2	18 AWG Solid Bare Copper 6.4 Ω/1000 ft	Plenum PVC .008 in	None	Flex Plenum PVC	Interlocking Aluminum	.355 in	CMP
AR60991	2	16 AWG Solid Bare Copper 4.2 Ω/1000 ft	Plenum PVC .008 in	None	Flex Plenum PVC	Interlocking Aluminum	.377 in	CMP
AR60993	2	14 AWG Solid Bare Copper 2.6 Ω/1000 ft	Plenum PVC .008 in	None	Flex Plenum PVC	Interlocking Aluminum	.425 in	CMP
AR60995	2	12 AWG Solid Bare Copper 1.8 Ω/1000 ft	Plenum PVC .010 in	None	Flex Plenum PVC	Interlocking Aluminum	.522 in	CMP

Shielded FPLP

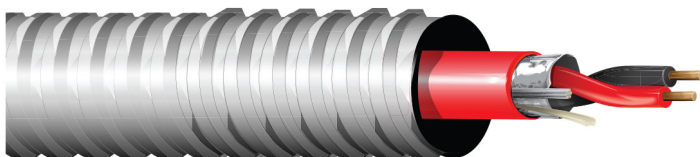

Catalog No.	No. Of Conductors	Cond. Type & Nom. DCR	Insulation Type & Thickness	Shielding	Jacket Type & Thickness	Armoring Type	Nom. O.D.	NEC Rating
AR60975	2	18 AWG Solid Bare Copper 6.4 Ω/1000 ft	Plenum PVC .008 in	Overall 100% Al Foil	Flex Plenum PVC	Interlocking Aluminum	.366 in	CMP
AR60990	2	16 AWG Solid Bare Copper 4.2 Ω/1000 ft	Plenum PVC .008 in	Overall 100% Al Foil	Flex Plenum PVC	Interlocking Aluminum	.389 in	CMP