



- NOTES:
- MATERIALS AND FINISHES:  
 BODY - BRASS, NICKEL PLATING  
 CONTACT - BRASS, GOLD PLATING  
 INSULATOR - PTFE  
 SHELL - BRASS, NICKEL PLATING  
 RETAINING RING - BRASS, NICKEL PLATING  
 GASKET - SILICONE RUBBER, RED3  
 SPRING - SK5 STEEL, NICKEL PLATING  
 WASHER - BRASS, NICKEL PLATING  
 FERRULE - BRASS, NICKEL PLATING  
 BARREL - BRASS, NICKEL PLATING
  - ELECTRICAL:  
 A. IMPEDANCE: 50 OHM  
 B. FREQUENCY RANGE: DC - 4 GHz  
 C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
  - MECHANICAL:  
 A. DURABILITY: 500 CYCLES, MIN.  
 B. TEMPERATURE RANGE: -65° C TO 165° C
  - PACKAGING:  
 A. QUANTITY: 1 CONNECTOR 1 CONTACT & 1 FERRULE PER BAG, 25 BAGS PER BOX  
 B. MARKING: "AMPHENOL, 112562-WP, AND DATE CODE"  
 C. ADDITIONAL LABEL ON BOTH BOX & CARTON  
 "CN-BM53-8-25 RG213 BNC 50 Ohm 3pc 25pk"
  - CRIMP INFORMATION  
 A. CRIMPED FERRULE  
 HEX. CRIMP SIZE .429"  
 B. CRIMPED CONTACT PIN  
 HEX. CRIMP SIZE .100"
  - SHOWS CABLE ENTRY DIMENSIONS

REVISIONS				
REV	DESCRIPTION	DATE	ECN	BY
1	PRELIMINARY DESIGN	26-MAY-21		CC
2	PACKING NOTE CHANGED ON SHEET 1	30-NOV-21	----	TL

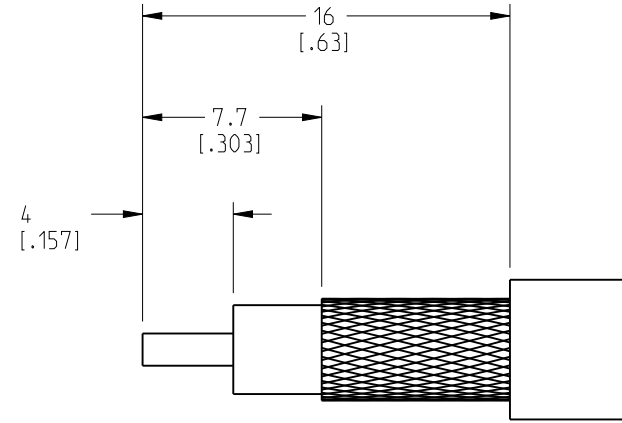

**RECOMMENDED CABLE STRIPPING DIMENSIONS**

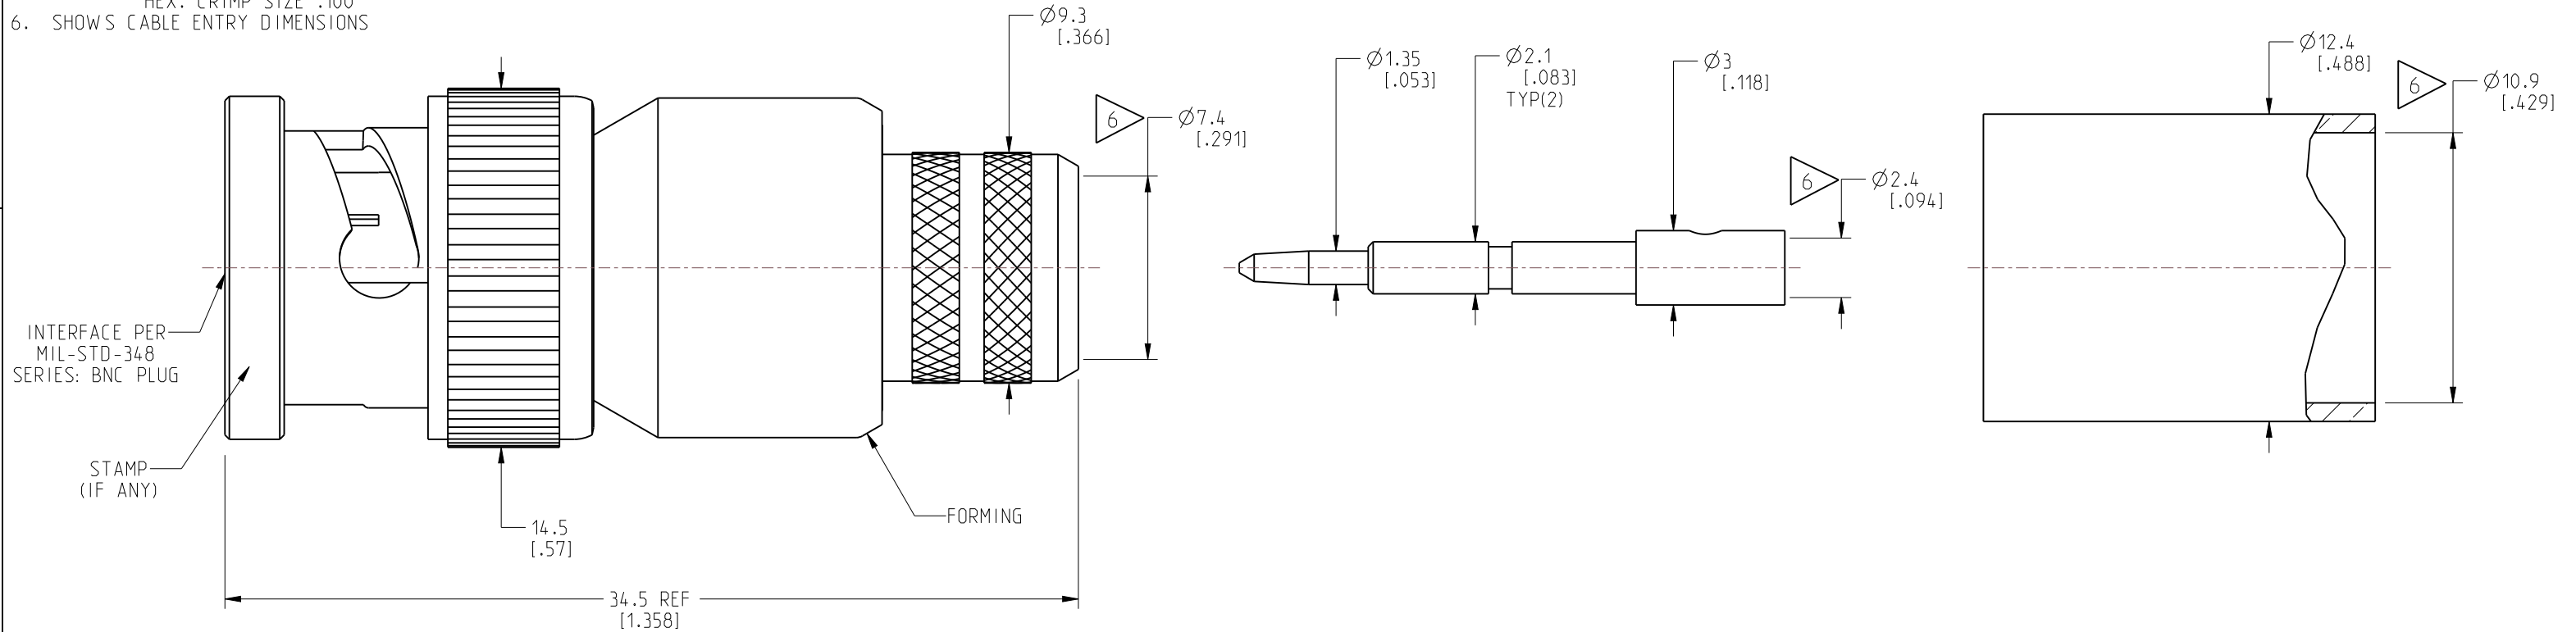

**PRELIMINARY ISSUE**

**CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE: <0.5mm = ±0.05mm [ $<0.020 = \pm 0.002$ ] >0.5 - 6mm = ±0.1mm [ $>0.020 - 0.236 = \pm 0.004$ ] >6.00 - 30mm = ±0.2mm [ $>0.236 - 1.181 = \pm 0.008$ ] >30.00 - 120mm = ±0.3mm [ $>1.181 - 4.725 = \pm 0.012$ ] ANGLES = ±1°		MATERIAL BNC CRIMP PLUG FOR BELDEN 8/U, 213/U		TITLE BNC CRIMP PLUG FOR BELDEN 8/U, 213/U		Amphenol RF	
THIRD ANGLE PROJ.		REFERENCE		ENGR.1 C.CROTTY		ENGR.2		DATE 26-MAY-21	
EAR# 10710		SHEET NO. 2 OF 2		SCALE: 4.0:1.0		DRAWING NO. 112562-WP		REV 1	
ITEM NO. 112562-WP		PART NO. 112562-WP		SIZE B		SHEET NO. 2 OF 2		SCALE: 4.0:1.0	