


NOTES:


1. MATERIALS AND FINISHES:
 BODY - BRASS, NICKEL PLATING
 CONTACT - BRASS, GOLD PLATING
 INSULATOR - PTFE
 SHELL - BRASS, NICKEL PLATING
 GASKET - SILICONE RUBBER, RED3
 SPRING - SK5 STEEL, NICKEL PLATING
 WASHER - BRASS, NICKEL PLATING2
 FERRULE - BRASS, NICKEL PLATING
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. FREQUENCY RANGE: DC - 4 GHz
 C. DIELECTRIC WITHSTANDING VOLTAGE: 300 VRMS, MIN.
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES, MIN.
 B. TEMPERATURE RANGE: -65° C TO 165° C
4. PACKAGING:
 A. QUANTITY: 1 CONNECTOR 1 CONTACT & 1 FERRULE PER BAG, 25 BAGS PER BOX
 B. MARKING: "AMPHENOL, 112563-WP, AND DATE CODE"
 C. ADDITIONAL LABEL ON BOTH BOX & CARTON
 "CN-BM53-8-25 RG213 BNC 50 Ohm 3pc 25pk"

5. CRIMP INFORMATION
 A. CRIMPED FERRULE
 HEX. CRIMP SIZE .429"
 B. CRIMPED CONTACT PIN
 HEX. CRIMP SIZE .118" FOR ULTRAFLEX CABLE ONLY
6. SHOWS CABLE ENTRY DIMENSIONS




REVISIONS				
REV	DESCRIPTION	DATE	ECN	BY
1	PRELIMINARY DESIGN	26-MAY-21		CC
2	PACKAGING NOTE CHANGED ON SHEET 1	30-NOV-21	----	TL

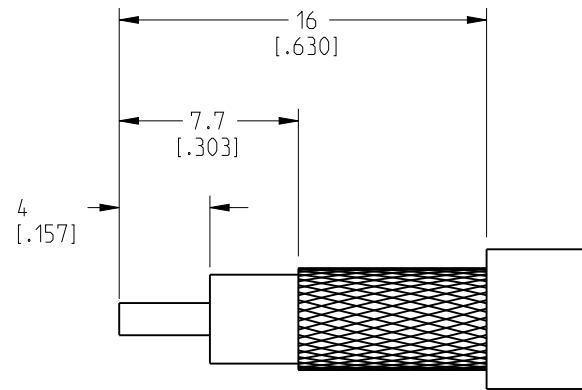

RECOMMENDED CABLE STRIPPING DIMENSIONS

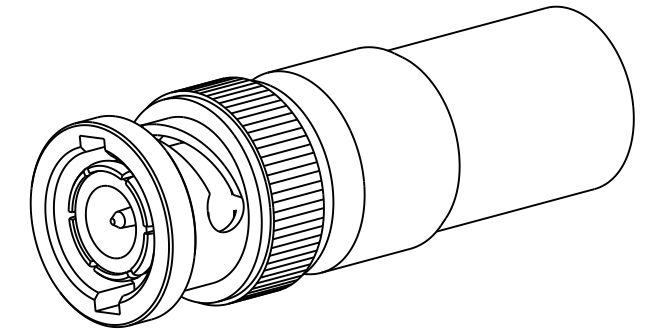

SCALE 2.000

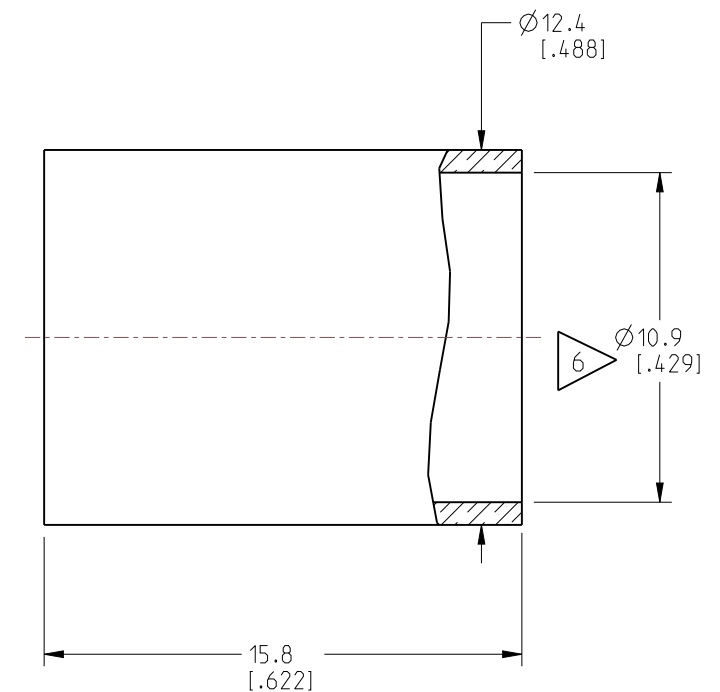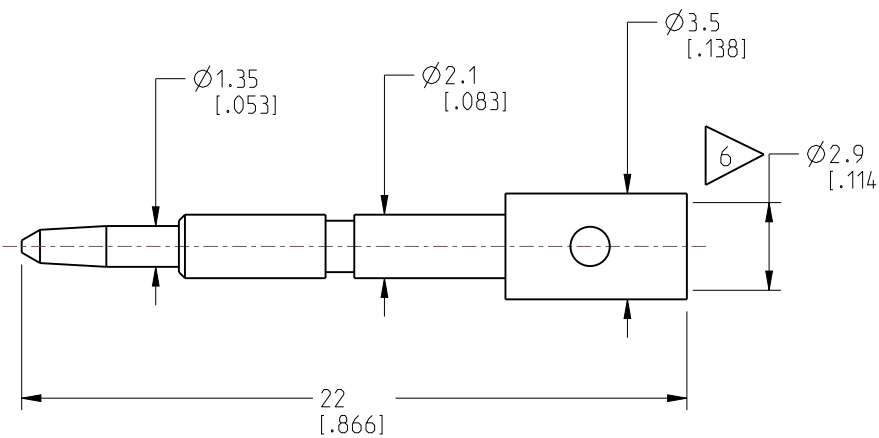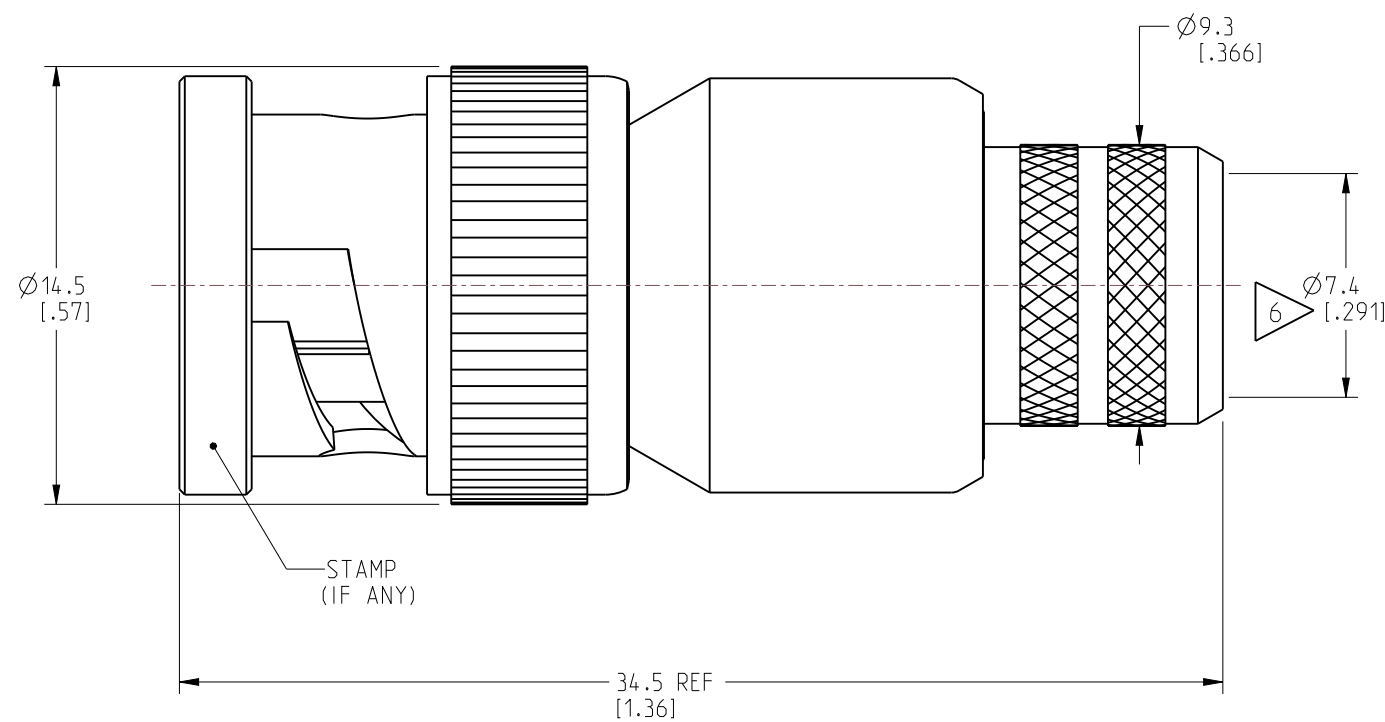

PRELIMINARY ISSUE

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE: <0.5mm = ±0.05mm [-0.020 = ±0.002] >0.5 - 6mm = ±0.1mm [-0.020 - 0.236 = ±0.004] >6.00 - 30mm = ±0.2mm [-0.236 - 1.181 = ±0.008] >30.00 - 120mm = ±0.3mm [-1.181 - 4.725 = ±0.012]		MATERIAL ENGR.1 C.CROTTY ENGR.2 DATE 26-MAY-21		TITLE BNC CRIMP PLUG FOR BELDEN 8214, 9913, 9914 SHEET NO. 2 OF 2 SCALE: 4.0:1.0		Amphenol RF DRAWING NO. 112563-WP ITEM NO. 112563-WP PART NO. 112563-WP REV 1	
THIRD ANGLE PROJ.	REFERENCE	EAR# 10710	ANGLES = ±1°						